


# Verso CF 2000 F C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	1995
Nominal air flow according to ErP 2018, l/s	554
Electric air heater capacity, kW / Δt, °C	7,5/10,1
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	16,6
Maximal operating current HW, A	11,7
Power supply cable E, mm <sup>2</sup>	5×2,5
Power supply cable W, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	450
Noise power level, L <sub>WA</sub> , dB(A)	56
Noise pressure level, L <sub>pA</sub> , dB(A), (3 m)	45
Filters dimensions B×H×L, mm	800×375×96
Unit dimensions B×H×L, mm	1600×480×1750
Panel thickness, mm	50
Maintenance space, mm	550
Unit weight, kg	235



## Performance

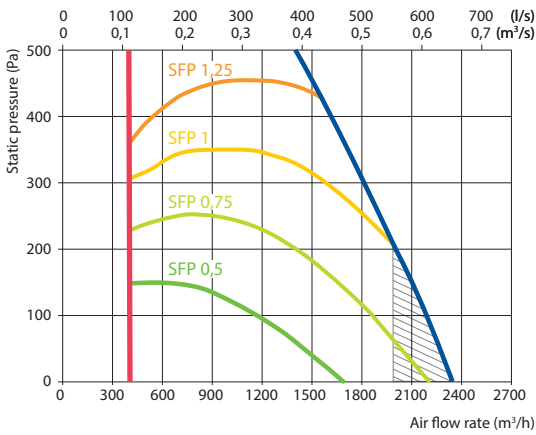

Does not conform to ErP2018 requirements

## Accessories

Closing damper	SRU-M-600x300+LF24/LM24
Silencer	ODA/EHA STS-BQUNBM-700x400-700-S SUP/ETA STS-IB6GBC-700x400-1250-S
Water heater	SVK-700x400-2
PPU	PPU-HW-3R-15-1,6-W2
Water cooler	DCW-2,0-13
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-2,0-14
Cooling unit	MOU-48HFN8+KA8140

## Mounting positions



## Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,5	15,4	15,9	16,7	17,7	22,6	23,5	24,5
Indoor +22 °C, 20 % RH								


## Hot water duct air heater \*

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	5,0	5,0	5,0
Flow rate, dm <sup>3</sup> /h	221	220	219
Pressure drop, kPa	1,0	1,0	1,0
Temperature in/out, °C	14,5 / 22,0		
Maximal capacity, kW	22,5	18,0	13,4
Connection, "	¾		

\* Option

## Shown as right (R1)

View from inspection side

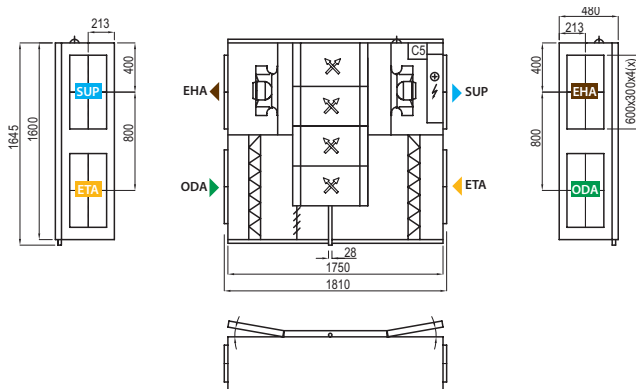

## Shown as left (L1)



▶ ODA – outdoor intake    ▶ SUP – supply air    ▶ ETA – extract indoor    ▶ EHA – exhaust air