

EL 400 EC K 01


159288

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 40 °C in continuous operation
- Housing made of aluminum



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

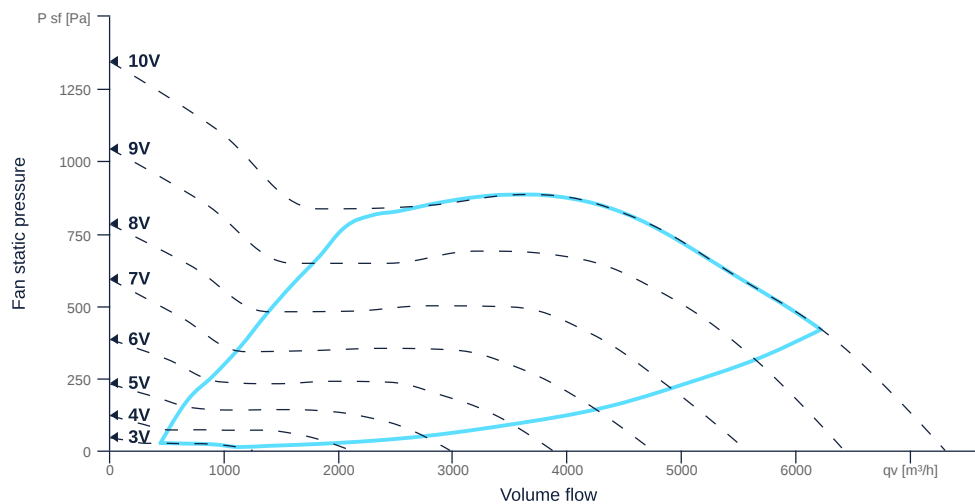

zur Produktseite

EL 400 EC K 01

159288

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxHduct
Pipe connection size (DN)	DN400		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	16 A		fuse
Housing material	Aluminium		matcasing
Impeller material	Aluminium		matimpeller
IP-Protection class (terminal box)	IP66		IPebox
Weight	16.5	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2909	1/min	n _{opt}
Efficiency level	68.8	%	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	1.59	kW	P _{e, opt}
Overall efficiency	77.2	%	η _{ges}
Measurement category	B		meas cat
Fan pressure at optimum energy efficiency point	823	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	4606	m ³ /h	Q _{v, opt}



zur Produktseite