

MPX 315 D4 40


158813

- Backward curved radial impeller
- Swing out fan unit
- Housing made of sheet steel, designed as grease pan
- IE3 motor outside the airflow, controllable
- Conveyed medium temperature up to 80 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

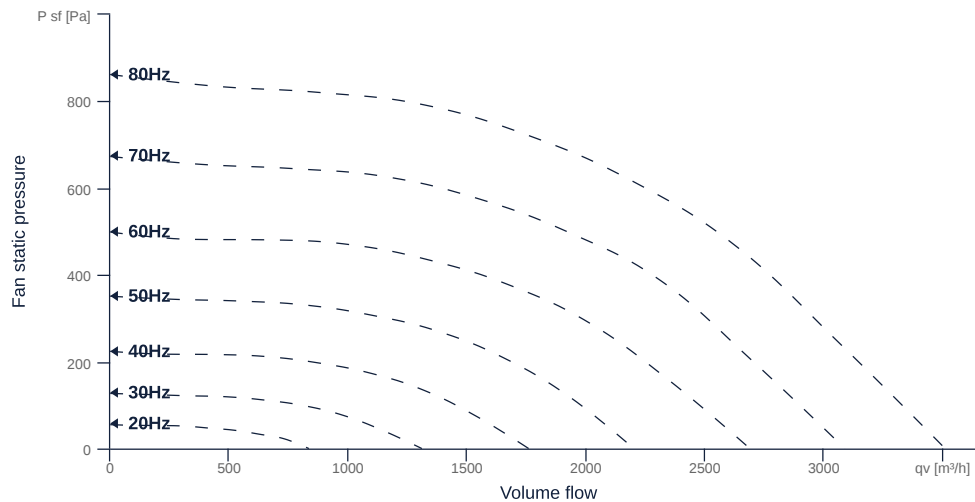

zur Produktseite

MPX 315 D4 40

158813

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		matcasing
Weight	31.4	kg	m
Nominal air flow rate, nominal point m ³ /h	1839.6	m ³ /h	Q _{v,nom}
Nominal external pressure, static	522.1	Pa	p _{s,nom}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.51	m ³ /s	Q _{v,nom}
Actual electrical input power, nominal point	0.49	kW	P _{e,nom}
Face velocity, nominal point	5.2	m/s	V _{nom}
Nominal external pressure, static	522.1	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	52.7	%	η _{es,SUP}
Highest external air leakage rate	0.06	%	
Enclosure sound level, nominal point	78	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MOTOR DATA

Name	Value	Unit	Formula symbol
Rated frequency (device)	50		f
Is pole-changeable	No		polexch



zur Produktseite