

KVR 6035 E4 31


131312

- Backward curved radial impeller
- Removable fan unit
- Housing made of galvanized sheet steel
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 65 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

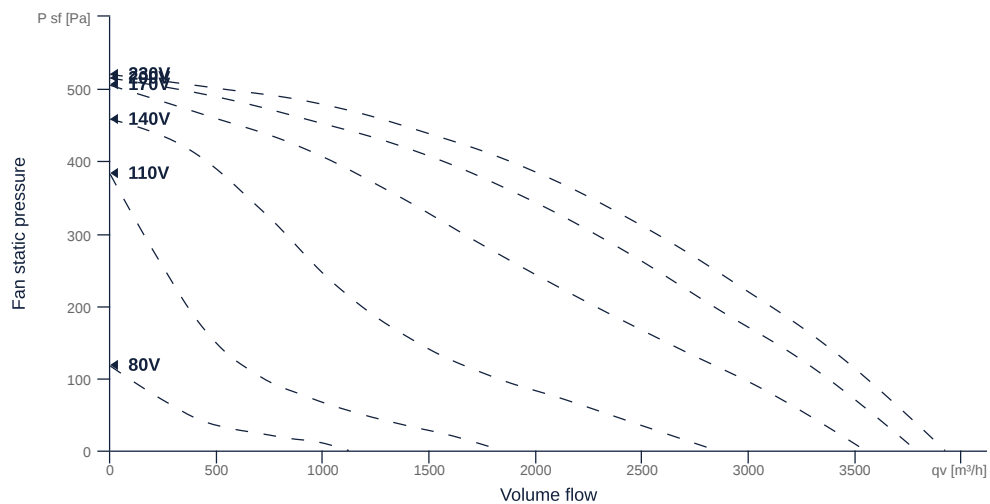

zur Produktseite

KVR 6035 E4 31

131312

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	600x350		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	28.1	kg	m
Nominal air flow rate, nominal point m ³ /h	3016.8	m ³ /h	q _{V,nom}
Nominal external pressure, static	213	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.84	m ³ /s	q _{V,nom}
Actual electrical input power, nominal point	0.45	kW	P _{e,nom}
Face velocity, nominal point	4	m/s	v _{nom}
Nominal external pressure, static	213	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	47.2	%	η _{es,SUP}
Highest external air leakage rate	0.18	%	
Enclosure sound level, nominal point	74	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



zur Produktseite