


# Verso CF 1300 U C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	1341
Nominal air flow according to ErP 2018, l/s	373
Electric air heater capacity, kW / Δt, °C	4,5/9,3
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	12,7
Maximal operating current HW, A	6,5
Power supply cable E, mm <sup>2</sup>	5×1,5
Power supply cable W, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	370
Noise power level, L <sub>WA</sub> , dB(A)	59
Noise pressure level, L <sub>PA</sub> , dB(A), (3 m)	48
Filters dimensions B×H×L, mm	800×400×46
Unit dimensions B×H×L, mm	910×905×1810
Panel thickness, mm	50
Maintenance space, mm	800
Unit weight, kg	225



## Performance

Verso CF 1300 UH with standard equipment

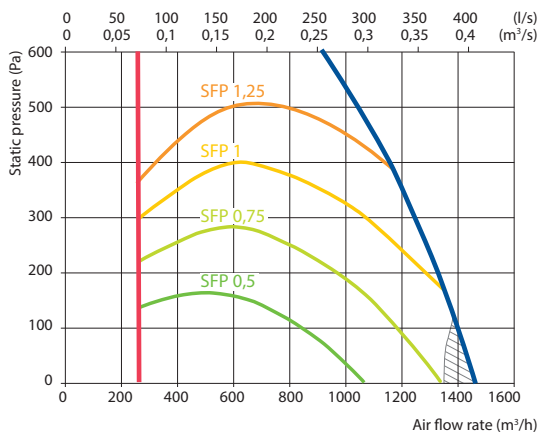

Does not conform to ErP2018 requirements

## Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1-W2
Water cooler	DCW-1,4-9
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8243

## Temperature efficiency


Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,6	15,5	16,4	16,8	17,8	22,6	23,6	24,6

Indoor +22 °C, 20 % RH


## Changeover water/ DX heating – cooling exchanger (HCW/HCDX)

	Winter		Summer	
	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	-	-
Condensation/evaporation T, °C	-	-	45	45/5
Capacity, kW	3,4	8,6	3,4	9,3
Maximal capacity, kW	11,0	10,7	6,8	11,5
Pressure drop, kPa	1	49,5	-	-
Air temperature in/out, °C	14,6 / 22	30 / 18	14,6 / 22	30 / 18
Connection, " / mm	½		½ / 22	

Shown as right (R1)

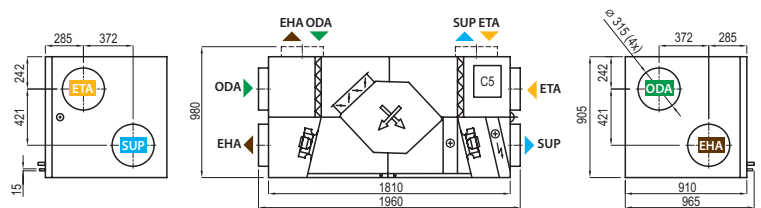

Shown as left (L1)

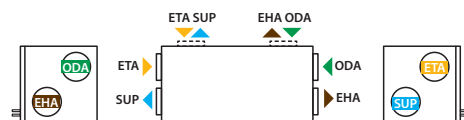

▶ ODA – outdoor intake    ▶ SUP – supply air    ▶ ETA – extract indoor    ▶ EHA – exhaust air