


# Verso CF 1300 F C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	1317
Nominal air flow according to ErP 2018, l/s	366
Electric air heater capacity, kW / Δt, °C	4,5/9,5
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	11,7
Maximal operating current HW, A	5,5
Power supply cable E, mm <sup>2</sup>	5×1,5
Power supply cable W, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	360
Noise power level, L <sub>WA</sub> , dB(A)	59
Noise pressure level, L <sub>pA</sub> , dB(A), (3 m)	48
Filters dimensions B×H×L, mm	550×420×46
Unit dimensions B×H×L, mm	1100×527×1650
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	175



## Performance

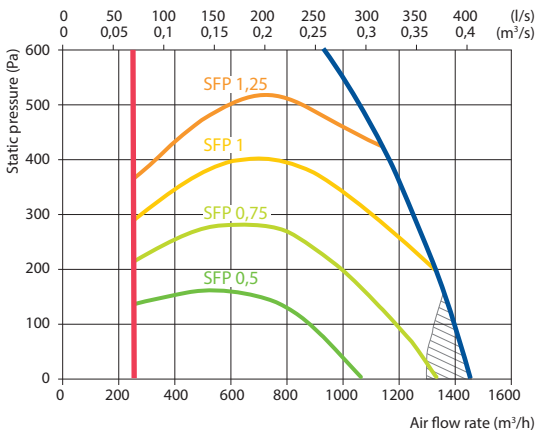

Does not conform to ErP2018 requirements

## Accessories

Closing damper	AGUJ-M-315-LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
Water cooler	DCW-1,4-9
PPU	PPU-HW-3R-15-1-W2
Water heater-cooler	DHCW-315
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-1,4-10
Cooling unit	MOU-36HFN8+KA8243

## Mounting positions



## Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	16,2	16,5	16,8	17,4	18,1	22,6	23,7	24,9

Indoor +22 °C, 20 % RH


## Hot water duct air heater \*

	Winter		
	80/60	70/50	60/40
Water temperature in/out, °C			
Capacity, kW	2,6	2,6	2,6
Flow rate, dm <sup>3</sup> /h	115	115	114
Pressure drop, kPa	4,4	4,4	4,4
Temperature in/out, °C	16,2 / 22,0		
Maximal capacity, kW	11,9	9,5	7,1
Connection, "	½		


\* Option

## Shown as right (R1)

View from inspection side

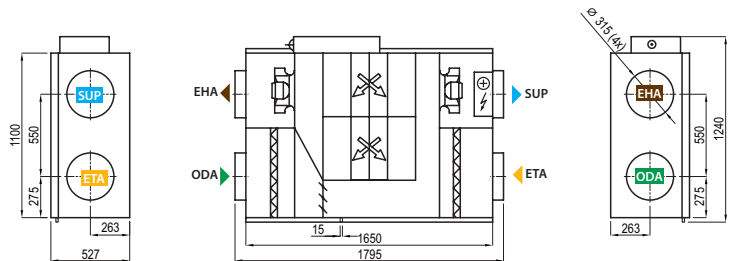

## Shown as left (L1)

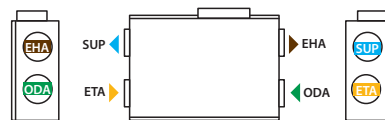

▶ ODA – outdoor intake    ▶ SUP – supply air    ▶ ETA – extract indoor    ▶ EHA – exhaust air