

# DHA 250 EC CP 21


159129

- Horizontal discharge radial fan
- Backward curved radial impeller
- Hinged housing made of weather resistant plastic ASA
- High efficiency EC motor, steplessly controllable
- Internal electronic temperature monitoring
- Integrated device switch and constant pressure control



## MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

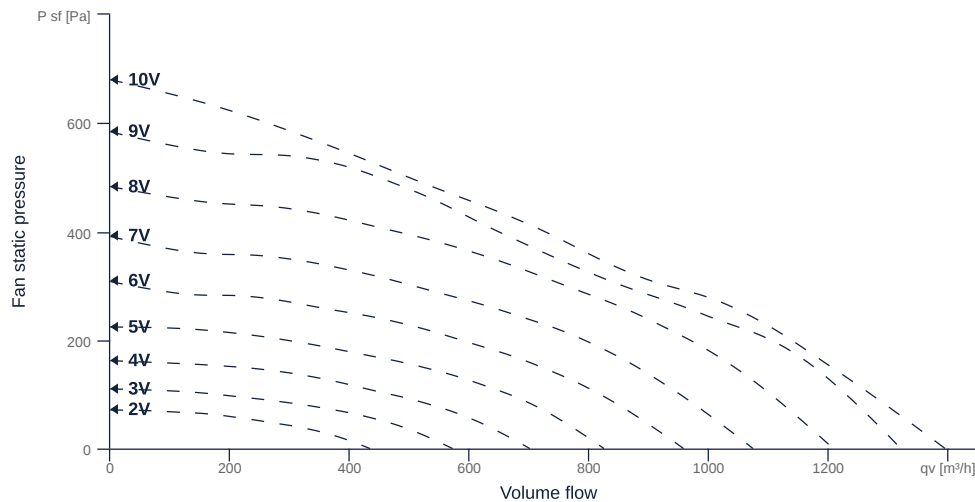

zur Produktseite

# DHA 250 EC CP 21

159129

**ruck**

## GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxHduct
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U <sub>rated</sub>
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		matcasing
Impeller material	Plastic		matimpeller
IP-Protection class (terminal box)	IP54		IPebox
Weight	5.65	kg	m
Nominal air flow rate, nominal point m <sup>3</sup> /h	687.6	m <sup>3</sup> /h	q <sub>v,nom</sub>
Nominal external pressure, static	303.9	Pa	p <sub>s,nom</sub>
Fan type	Radial		Fantype
Category / Installation situation	A		cat

## ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m <sup>3</sup> /s	0.19	m <sup>3</sup> /s	Q <sub>v,nom</sub>
Actual electrical input power, nominal point	0.12	kW	P <sub>e,nom</sub>
Face velocity, nominal point	2.5	m/s	V <sub>nom</sub>
Nominal external pressure, static	303.9	Pa	p <sub>s,nom</sub>
supply air fan static efficiency, nominal point	51.5	%	η <sub>es,SUP</sub>
Enclosure sound level, nominal point	84	dB(A)	L <sub>WA2</sub>
Rating	Product is compliant 2018		



zur Produktseite