



Verso CF 3000 F C5

Nominal air flow according to ErP 2018, m ³ /h	2950
Nominal air flow according to ErP 2018, l/s	819
Electric air heater capacity, kW / Δt, °C	9/8,4
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	17,1
Maximal operating current HW, A	8,3
Power supply cable E, mm ²	5×2,5
Power supply cable W, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	752
Noise power level, L _{WA} , dB(A)	48
Noise pressure level, L _{PA} , dB(A), (3 m)	38
Filters dimensions B×H×L, mm	1000×498×92
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions B×H×L, mm	2000×594×2050
Panel thickness, mm	45
Maintenance space, mm	560
Unit weight, kg	365

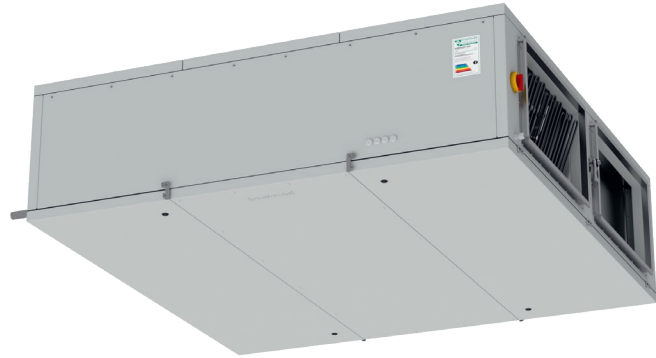

Performance

Verso CF 3000 F with standard equipment

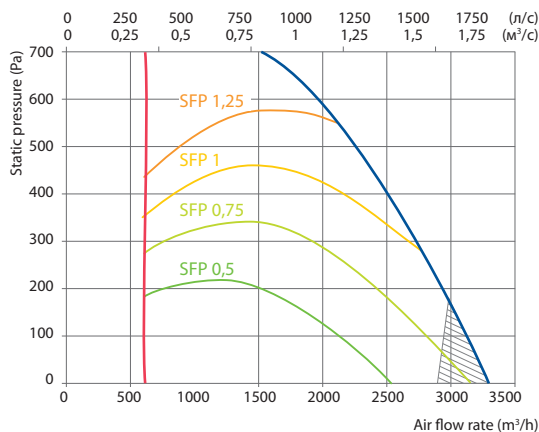

Accessories

Closing damper	SRU-M-750×400+LF24/LM24
Silencer	ODA/ETA STS-B6SD8W-750-400-500-S SUP/EHA STS-BTCYBB-750-400-1200-S
Water heater	SVK-750×400-2R
PPU	PPU-HW-3R-15-2,5-W2
Water cooler	DCW-3,0-20
2-way valve	VVP45.25-6,3+SSB161.05HF
DX cooler	DCF-3.0-20-2
Cooling unit for ducted cooler	2×MOU-36HFN8a+KA8142

Temperature efficiency

	Winter					Summer		
Outside temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,7	15,8	16,6	17,3	18	22,5	23,4	24,3

Indoor +22 °C, 20 % RH


Hot water duct air heater *

	Winter		
Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	4	4	4
Flow rate, dm ³ /h	178	177	176
Pressure drop, kPa	1	1	1
Temperature in/out, °C	18 / 22		
Maximal capacity, kW	24,9	19,5	14
Connection, "	¾		


* Option

Shown as right (R1)

View from inspection side

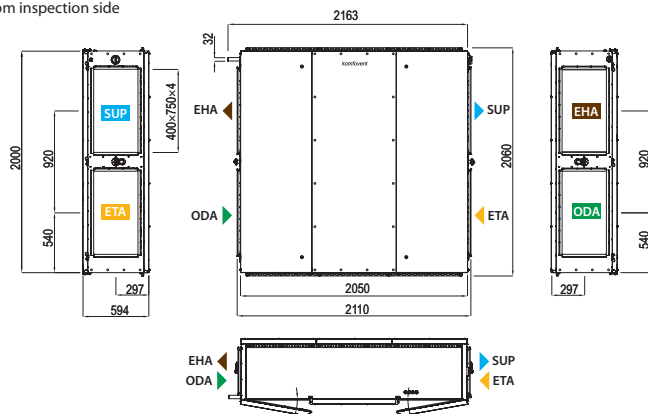

Shown as left (L1)



ODA – outdoor intake

SUP – supply air

ETA – extract indoor

EHA – exhaust air