

# DHA 190 EC O R 01


165191

- Horizontal discharge radial fan
- Backward curved impeller
- Housing made of aluminium AlMg3
- High efficiency EC motor, steplessly controllable
- Internal electronic temperature monitoring
- Integrated repair switch



## MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

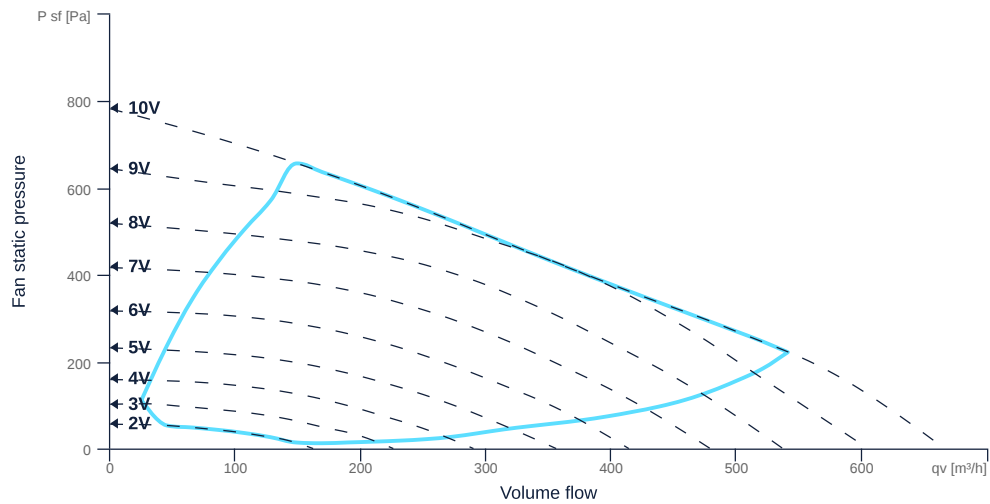

zur Produktseite

## GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxH <sub>duct</sub>
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U <sub>rated</sub>
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat <sub>casing</sub>
Impeller material	Plastic		mat <sub>impeller</sub>
Weight	4.93	kg	m
Nominal air flow rate, nominal point m <sup>3</sup> /h	295.2	m <sup>3</sup> /h	q <sub>v,nom</sub>
Nominal external pressure, static	275.6	Pa	p <sub>s,nom</sub>
Fan type	Radial		Fa <sub>type</sub>
Category / Installation situation	A		cat

## ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m <sup>3</sup> /s	0.08	m <sup>3</sup> /s	q <sub>v,nom</sub>
Actual electrical input power, nominal point	0.06	kW	P <sub>e,nom</sub>
Face velocity, nominal point	1.6	m/s	V <sub>nom</sub>
Nominal external pressure, static	275.6	Pa	p <sub>s,nom</sub>
supply air fan static efficiency, nominal point	44.8	%	η <sub>es,SUP</sub>
Rating	Product is compliant 2018		



zur Produktseite