

KVRI 8050 D4 30


131417

- Backward curved radial impeller
- Swing out fan unit
- Galvanized sheet steel housing, double-walled, 25 mm mineral wool
- Efficient IE3 motor, frequency controllable
- Conveyed medium temperature up to 60 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

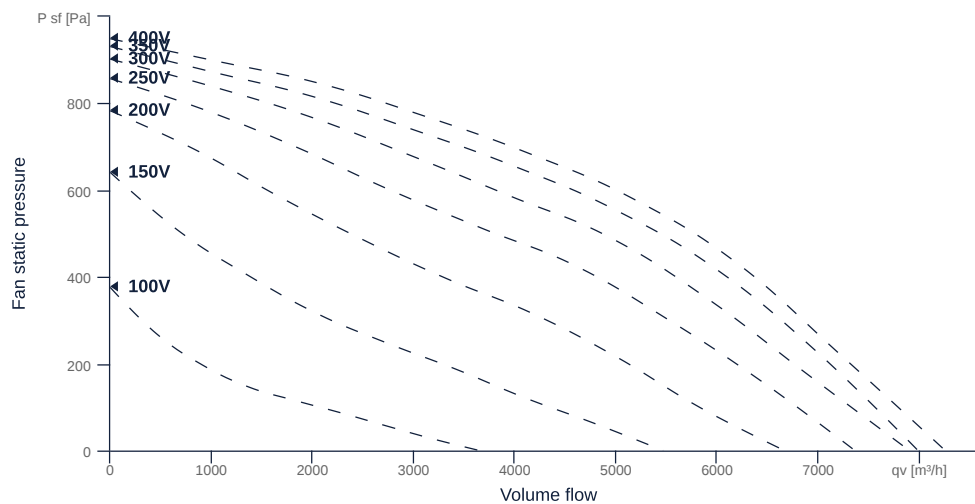

zur Produktseite

KVRI 8050 D4 30

131417

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Rated voltage (entire device)	400	V	U _{rated}
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		matcasing
IP-Protection class (terminal box)	IP44		IPebox
Weight	77.5	kg	m
Nominal air flow rate, nominal point m ³ /h	6411.6	m ³ /h	Q _{v,nom}
Nominal external pressure, static	394	Pa	p _{s,nom}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	1.78	m ³ /s	Q _{v,nom}
Actual electrical input power, nominal point	1.45	kW	P _{e,nom}
Face velocity, nominal point	4.45	m/s	V _{nom}
Nominal external pressure, static	394	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	54	%	η _{es,SUP}
Enclosure sound level, nominal point	68	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MOTOR DATA

Name	Value	Unit	Formula symbol
Rated frequency (device)	50		f
Is pole-changeable	No		polexch



zur Produktseite