

# DHA 250 EC 40


149169

- Horizontal discharge radial fan
- Backward curved impeller
- Housing made of aluminium AlMg3
- High efficiency EC motor, steplessly controllable
- Internal electronic temperature monitoring



## MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

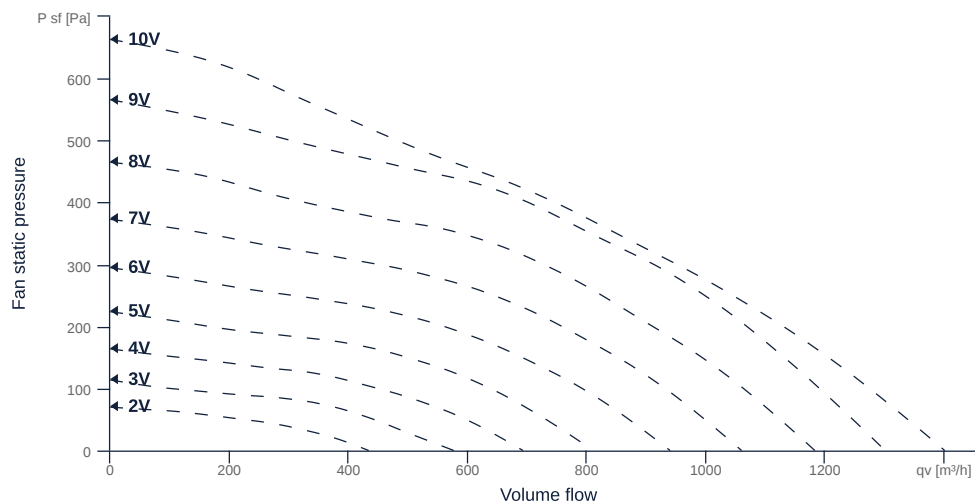

zur Produktseite

# DHA 250 EC 40

149169

**ruck**

## GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxHduct
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U <sub>rated</sub>
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		matcasing
Impeller material	Plastic		matimpeller
Weight	5.1	kg	m
Nominal air flow rate, nominal point m <sup>3</sup> /h	619.2	m <sup>3</sup> /h	q <sub>v,nom</sub>
Nominal external pressure, static	256.9	Pa	p <sub>s,nom</sub>
Fan type	Radial		Fa <sub>type</sub>
Category / Installation situation	A		cat

## ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m <sup>3</sup> /s	0.17	m <sup>3</sup> /s	q <sub>v,nom</sub>
Actual electrical input power, nominal point	0.09	kW	P <sub>e,nom</sub>
Face velocity, nominal point	3.3	m/s	v <sub>nom</sub>
Nominal external pressure, static	256.9	Pa	p <sub>s,nom</sub>
supply air fan static efficiency, nominal point	51.5	%	η <sub>es,SUP</sub>
Enclosure sound level, nominal point	83	dB(A)	L <sub>WA2</sub>
Rating	Product is compliant 2018		



zur Produktseite