



SILENT AND POWERFUL MIXED FLOW EXTRACT FAN

APPLICATION

Ideal for air-extraction in bathroom, toilet and small/medium premises.
Suitable to extract stale air directly to the outside or through medium length ducting.
Unit is available in Ø100mm and can be wall/panel, ceiling or window mounted.

SPECIFICATION

Casing made of high quality ABS provides long lasting shock-proof and robust construction. The unit is finished in white RAL 9010 and are UV resistant.

High efficient impeller, providing enhanced aerodynamic properties, low noise and increased performances.

Single-phase induction motor with integral thermal protection.
Suitable for continuous and intermittent running.

FEATURES & BENEFITS

IP45 protection degree.

Stylish bright finishing of the front cover to meet any modern interior design requirement.

Aerodynamic-shaped inlet and front deflectors to reduce turbulences so to optimize the efficiency and the acoustic comfort.

Rigid optimised spigot support preventing distortion with strengthened guard and design to maximise airflow.

Back-draught shutter (accessory) to prevent air flowing back into the room when the fan is off.

Totally recyclable plastic components, environmentally friendly.

Double insulated: no earth connection is required.

Tested to the latest standards: units are tested in the TÜV Rheinland recognised laboratory at Aerauliqa, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon.
Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

MODELS

Quasar N

Equipped with high quality sleeve bearing motor.
Single speed operation.
Low power consumption (8W).

Quasar T

The fan is equipped with a timer circuit adjustable from $\pm 1'$ to 25'.
Operation: after switching off, the fan continues to run for the pre-set period of time.

Quasar 2S BB


Equipped with ball bearing motor to assure a longer fan life (30.000h): ideal for cold climates.
Two speed operation.
Top performance (105 m³/h).
Low power consumption (from 5W).

OPTIONS


Ball bearing motor type to assure a longer fan life (30.000h): ideal for cold climates.

Different voltage and frequency motors can be offered to meet specific needs.


Installation




central extraction




wall/panel




ceiling



window





direct exhaust





short length ducting

Dimensions (mm) and Weight (kg)



| Model | Quasar |
|--------|--------|
| □A | 164 |
| B | 84 |
| C | 27 |
| ØD | 99,4 |
| Weight | 0,5 |

Performance curve

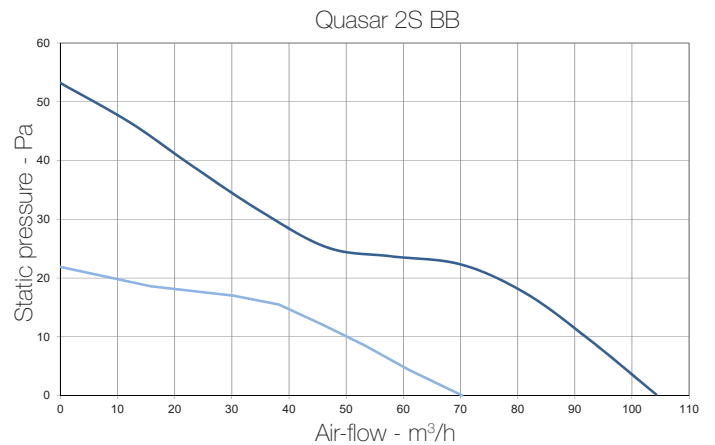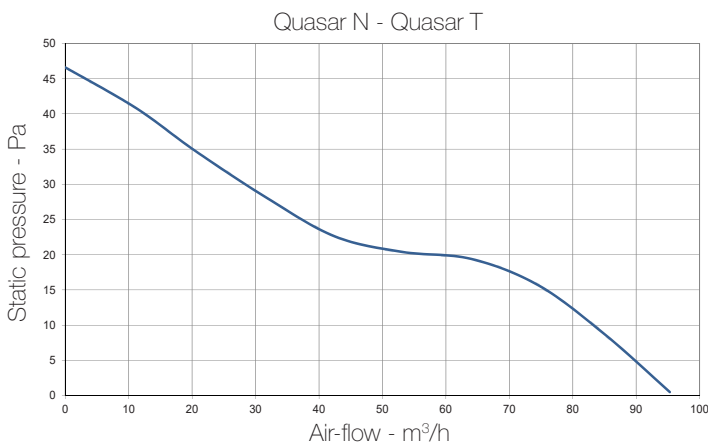

Performances

| Model | Quasar N | Quasar T | Quasar 2S BB |
|--|----------|----------|--------------|
| Air-flow m³/h | 95 | 95 | 105/70 |
| Static pressure Pa max | 47 | 47 | 53/22 |
| Power consumption W max | 8 | 8 | 8/5 |
| Sound pressure dB(A) @ 3m ⁽¹⁾ | 25 | 25 | 26/22 |
| Ambient temperature °C max | 50 | 50 | 50 |
| Marking/Mark | CE | CE | CE |

- 220-240V ~ 50/60Hz.
- air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2Kg/m³.
- data measured in the TÜV Rheinland recognised laboratory in Aeraulqa.
- (1) sound pressure level @ 3m in free field, for purposes only.

