

MPX 225 D2 40


158779

- Backward curved radial impeller
- Swing out fan unit
- Housing made of sheet steel, designed as grease pan
- IE3 motor outside the airflow, controllable
- Conveyed medium temperature up to 80 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

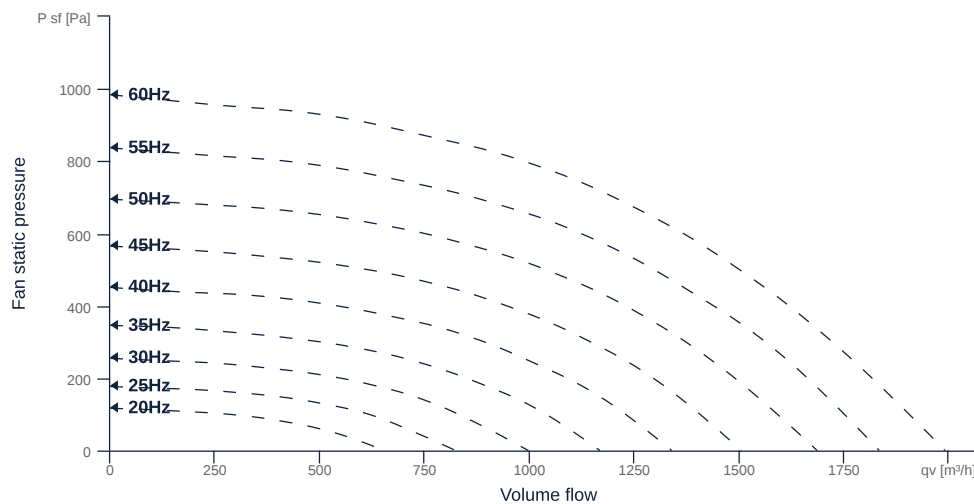

zur Produktseite

MPX 225 D2 40

158779

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN200		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	18.7	kg	m
Nominal air flow rate, nominal point m ³ /h	1162.8	m ³ /h	q _{v,nom}
Nominal external pressure, static	722.2	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.32	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.5	kW	P _{e,nom}
Face velocity, nominal point	10.3	m/s	v _{nom}
Nominal external pressure, static	722.2	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	53.2	%	η _{es,SUP}
Highest external air leakage rate	0.09	%	
Enclosure sound level, nominal point	76	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



zur Produktseite