


MPC 355 EC 40

159802

- Radial fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Highly efficient EC motor, steplessly controllable
- Internal electronic temperature monitoring
- With bottom tray



MAP

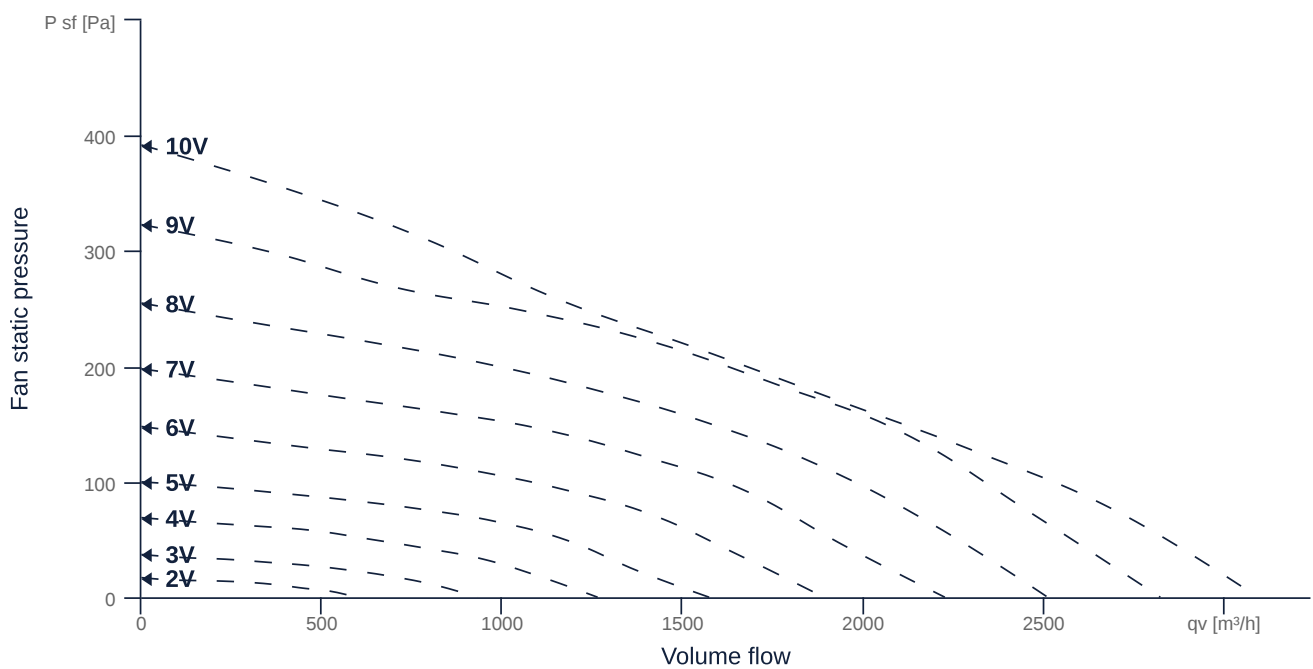

zur Produktseite

MPC 355 EC 40

159802

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	-		DN
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		matcasing
Impeller material	Steel		matimpeller
IP-protection class (entire device)	IPX4		IP _{compl}
Weight	49.4	kg	m
Nominal air flow rate, nominal point m ³ /h	1695.6	m ³ /h	q _{Vnom}
Nominal external pressure, static	189.3	Pa	ps _{nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat
Sound insulation	Yes		snd _{ins}
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)	50.000000			f
Motor type	EC			phase
Control type	stepless-controlled			ctrl _{type}
Installation	ORM (Out)			install
Rotation direction	right			rotation
Isolation class	ISO B			ISO _{class}
Motor-protection	TEC			protect _{motor}
Protection class	IP54			IP _{motor}
Is pole-changeable	No			pole _{exch}
Type of power supply	AC 1~			pwr _{sup} _{motor}
Rated voltage	230		V	U _{rated, f1}
Rated current	1.4		A	I _{rated, f1}
Shaft power	168		W	P _{out, f1}
Speed	1250		1/min	n _{r1}
Efficiency	65.5		%	η _{m, f1}
Min. temperature	-25		°C	T _{motor, min}
Cos Phi	0.000000	0.000000		cos φ
UL-Certification motor	UL recognized			UL _{cert}



zur Produktseite

MPC 355 EC 40

159802

PRODUCT INFORMATION

Name	Value	Unit	Formula symbol
Category / Installation situation	A		cat
Fan type	Radial		Fan _{type}



zur Produktseite