


Verso S 3000 F

Nominal air flow, m ³ /h	3600
Panel thickness, mm	50
Unit weight, kg	130
Filters dimensions BxHxL, mm	450x480x96
Electric power input of the fan drive at reference flow rate, W	930
Control panel	C5.1
Maintenance space, mm	600



The photo is intended for informational purposes only. exact details may vary.

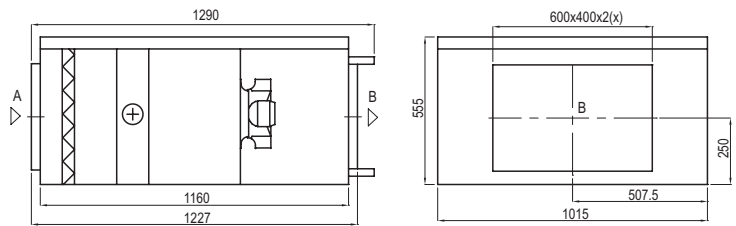

Acoustic data

A-weighted sound power level L_{wa} , dB(A) at nominal flow rate

Supply inlet	67
Supply outlet	78
Casing	53

A-weighted sound pressure level L_{pa} , dB(A)


10 m² normally isolated room, distance from casing – 3 m.

Surroundings	42
--------------	----

Technical data

Supply air handling unit	Supply voltage, V	Air heater capacity, kW	Maximal operating current, A	ΔT , °C
Verso S 3000 F-HW	3~400	–	3,8	–

Performance

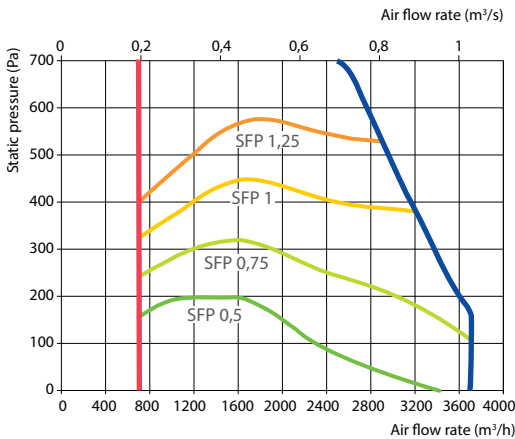

* Compliance to ErP2018 requirements check with the selection program.

Hot water air heater

Water temperature in/out, °C	80/60	70/50	60/40
Capacity, kW	32,6	32,6	32,6
Flow rate, dm ³ /h	1442	1435	1429
Pressure drop, kPa	4,5	4,5	4,5
Temperature in/out, °C	-5/22	-5/22	-5/22
Maximal capacity, kW	50,2	42,5	34,7
Connection, "	1		

Accessories (p. 120)

Closing damper	SRU-M-600x400+LF24/LM24
Silencer	A STS-IVR3BA-600-400-700-S
	B STS-IVR3BA-600-400-1250-S
PPU	PPU-HW-3R-25-6.3-W2
Air heater-cooler	DCW-3,0-20
2-way valve	VVP45.25-6,3+SSB61
DX cooler	DCF-3,0-20-2
Cooling unit	2xMOU-36HFN6-KA8243