


Verso R 1300 F C5

Nominal air flow according to ErP 2018, m ³ /h	1134
Nominal air flow according to ErP 2018, l/s	315
Electric air heater capacity, kW / Δt, °C	3/5,7
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	11,1
Maximal operating current HW, A	7,1
Power supply cable E, mm ²	5×1,5
Power supply cable W, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	370
Noise power level, L _{WA} , dB(A)	54
Noise pressure level, L _{PA} , dB(A), (3 m)	44
Filters dimensions B×H×L, mm	410×420×46
Unit dimensions B×H×L, mm	940×480×1360
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	144



Performance

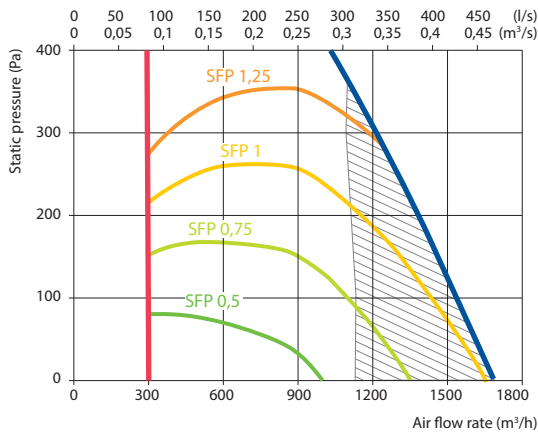


Does not conform to ErP2018 requirements

Accessories

Closing damper	AGUJ-M-315-LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
Water cooler	DCW-1,2-8
PPU	PPU-HW-3R-15-1,0-W2
Water heater-cooler	DHCW-315
2-way valve	VVP47.15-2,5+SSF161.05HF
DX cooler	DCF-1,2-8
Cooling unit	MOU 24HFN8+KA8243

Mounting positions

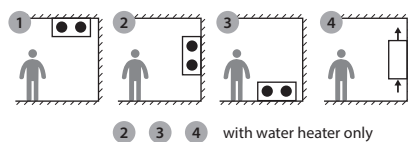

2 3 4 with water heater only

Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	10,0	12,1	13,5	14,8	16,1	22,8	24,1	25,5

Indoor +22 °C, 20 % RH


Hot water duct air heater *

Water temperature in/out, °C	Winter		
	80/60	70/50	60/40
Capacity, kW	4,8	4,8	4,8
Flow rate, dm ³ /h	214	213	212
Pressure drop, kPa	10,9	11,0	11,0
Temperature in/out, °C	10,0 / 22,0		
Maximal capacity, kW	12,4	10,2	8,0
Connection, "	½		


* Option

Shown as right (R1)

View from inspection side

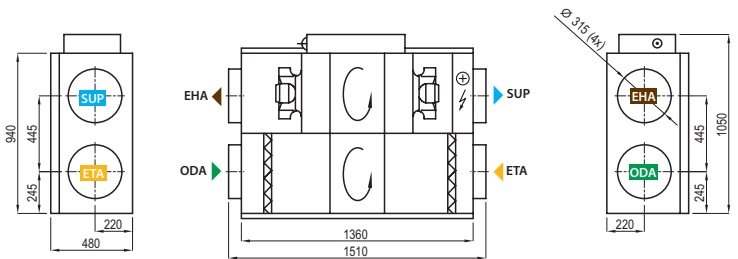

Shown as left (L1)



▶ ODA – outdoor intake ▶ SUP – supply air ▶ ETA – extract indoor ▶ EHA – exhaust air