


## Tlmič hluku kruhový

AGS-d-h-L-M

M – pozinkovaný plech

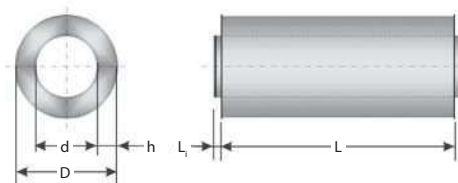

Rozmery, mm			Útlmové hodnoty pri frekvenčných pásmach, dB							
d	h	L	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
100	50	600	4	8	14	26	34	41	45	25
		900	8	11	21	33	48	50	50	28
125	50	600	3	6	12	22	28	37	38	22
		900	5	9	18	30	40	48	43	24
160	50	600	2	5	10	18	23	33	30	19
		900	3	8	16	27	36	47	37	21
200	50	900	2	7	13	24	31	44	31	20
		1200	3	7	14	30	37	46	31	21
		600	4	7	12	15	21	31	25	18
250	100	900	7	10	17	21	31	41	30	20
		900	1	6	11	21	27	39	25	19
250	50	1200	2	6	12	27	32	40	26	20
		600	3	5	9	12	18	26	20	17
315	100	900	6	8	14	17	27	36	24	20
		900	0	5	9	18	23	32	20	18
		1200	1	5	10	24	28	34	20	19
400	50	900	5	7	11	14	25	28	21	18
		1200	7	9	15	18	30	35	23	18
		900	0	4	7	15	19	23	18	17
400	100	1200	0	4	8	21	25	28	19	18
		900	3	5	8	11	23	19	17	15
500	100	1200	6	7	11	14	25	23	19	15
		900	3	5	7	10	18	17	16	14
630	100	1200	5	6	10	13	21	20	17	14
		900	2	4	6	10	13	14	14	13
630	100	1200	4	5	9	13	17	17	14	13

Rozmery, mm			h = 50 mm		
d	L <sub>1</sub>	D	L = 600 mm	L = 900 mm	L = 1200 mm
			Hmotnosť, kg	Hmotnosť, kg	Hmotnosť, kg
100	40	200	2,3	3,3	
125	40	225	2,7	3,9	
160	40	260	3,3	4,7	
200	40	300	4,0	5,6	7,3
250	40	350	4,9	6,8	8,8
315	40	415		8,4	11
400	65	500		11	14
500	65	600		13	17
630	65	730		17	21
			h = 100 mm		
200	40	400	5,2	7,2	
250	40	450	6,1	8,4	
315	40	515		10	13
400	65	600		12	16
500	65	700		15	19
630	65	830		19	24

Príklad objednávky: tlmič hluku AGS-250-50-900-M.