


DHA 560 D4 30


131104

- Horizontal discharge radial fan
- Backward curved impeller
- Housing made of aluminium AlMg3
- Robust three phase AC motor, voltage controllable
- Integrated thermal switch

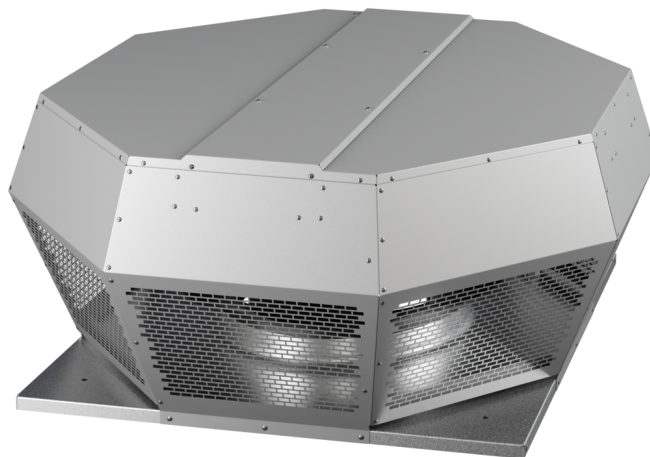

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

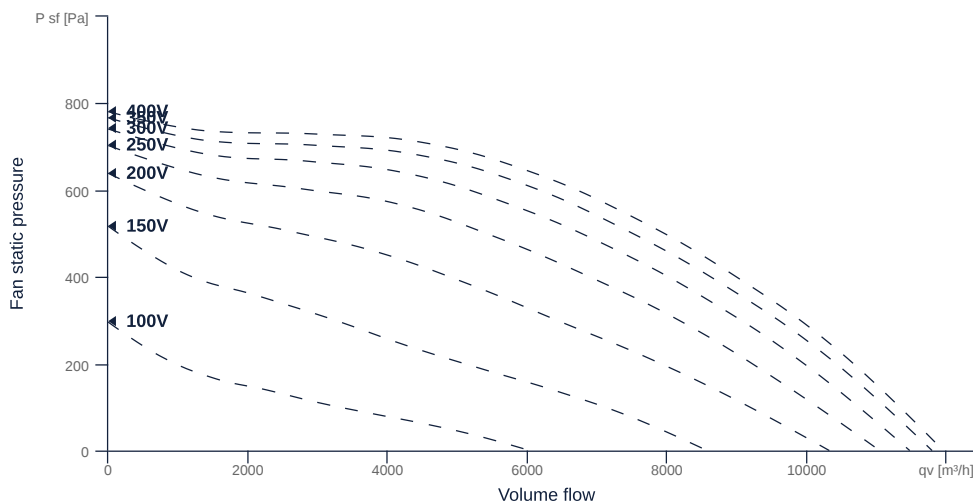

zur Produktseite

DHA 560 D4 30

131104

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Rated voltage (entire device)	400	V	U _{rated}
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		matcasing
IP-Protection class (terminal box)	IP44		IPebox
Weight	51	kg	m
Nominal air flow rate, nominal point m ³ /h	9673.2	m ³ /h	Q _{v,nom}
Nominal external pressure, static	324	Pa	p _{s,nom}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	2.69	m ³ /s	Q _{v,nom}
Actual electrical input power, nominal point	1.8	kW	P _{e,nom}
Face velocity, nominal point	3.87	m/s	V _{nom}
Nominal external pressure, static	324	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	54	%	η _{es,SUP}
Enclosure sound level, nominal point	91	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MOTOR DATA

Name	Value	Unit	Formula symbol
Rated frequency (device)	50		f
Is pole-changeable	No		polexch



zur Produktseite