





LD

COMBINED OUTDOOR LOUVRES

KOMFOVENT LD combined outdoor louvres are designed for use in ventilation systems for air supply from outside and/or air exhaust to the outdoors. Used together with KOMFOVENT ventilation units, they ensure efficient airflow through the external building envelope.

Main features:

- Easily integrated into building façades thanks to compact design.
- Constructed to prevent rain and snow from entering.
- Durable housing is corrosion-resistant and suitable for outdoor conditions.
- Integrated mesh prevents leaves and debris from entering the system.
- Quick and easy installation.

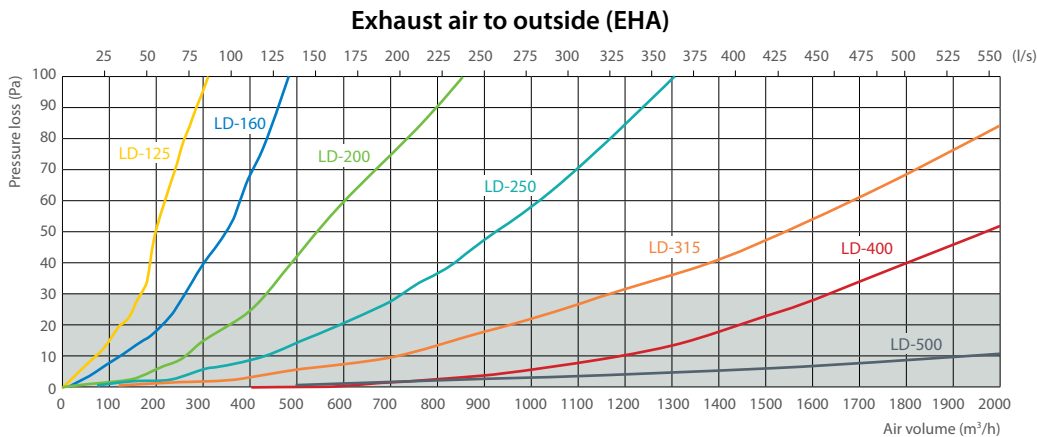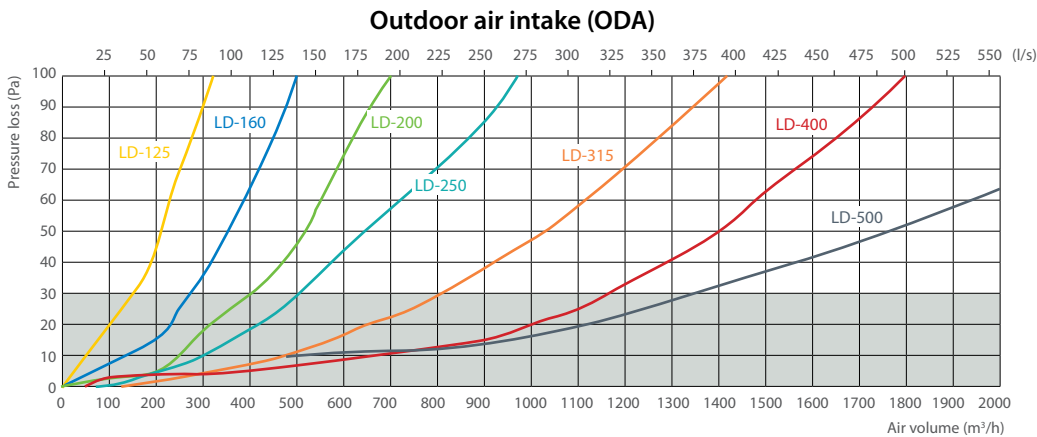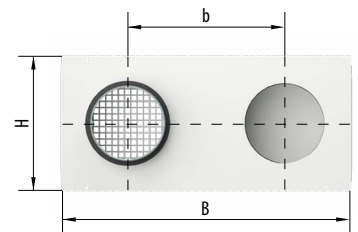

Recommended airflow/pressure drop

Model	Dimensions, mm						Code
	d	H	B	b	L	L ₁	
LD-125 white RAL9003	125	215	465	250	110	40	731420061
LD-125 black RAL9005	125	215	465	250	110	40	731420060
LD-160 white RAL9003	160	250	505	250	110	40	731420063
LD-160 black RAL9005	160	250	505	250	110	40	731420062
LD-200 white RAL9003	200	300	605	310	110	40	731420065
LD-200 black RAL9005	200	300	605	310	110	40	731420064
LD-250 white RAL9003	250	365	805	450	150	40	731420069
LD-250 black RAL9005	250	365	805	450	150	40	731420073
LD-315 white RAL9003	315	430	945	445	150	40	1008508
LD-315 black RAL9005	315	430	945	445	150	40	731420072
LD-400 white RAL9003	400	515	1100	503	150	40	-
LD-400 black RAL9005	400	515	1100	503	150	40	1125192
LD-500 white RAL9003	500	615	1700	710	150	40	-
LD-500 black RAL9005	500	615	1700	710	150	40	1246646