



# Verso R 1000 F C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	890
Nominal air flow according to ErP 2018, l/s	247
Electric air heater capacity, kW / Δt, °C	3/8,9
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	8,5
Maximal operating current HW, A	4,5
Power supply cable E, mm <sup>2</sup>	5×1,5
Power supply cable W, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	267
Noise power level, L <sub>WA</sub> , dB(A)	55
Noise pressure level, L <sub>PA</sub> , dB(A), (3 m)	44
Filters dimensions B×H×L, mm	410×420×46
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions B×H×L, mm	940×480×1360
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	140

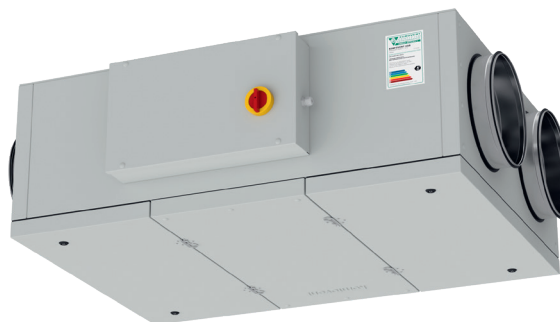

## Performance

Verso R 1000 F with standard equipment

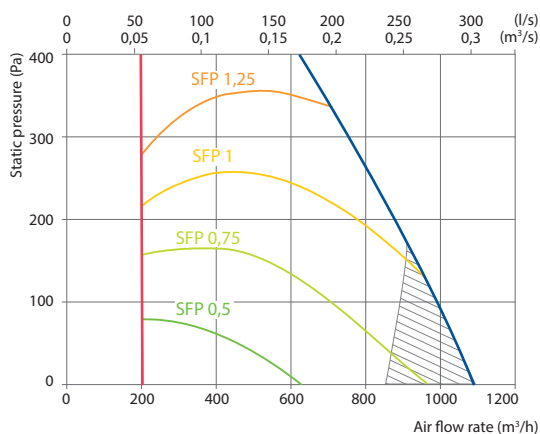


Does not conform to ErP2018 requirements

## Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1,0-W2
Water cooler	DCW-1,2-8
Water heater-cooler	DHCW-315
2-way valve	VVP47.15-2,5+SSF161.05HF
DX cooler	DCF-1,2-8
Cooling unit for ducted cooler	MOU-24HFN8a+KA8142

## Mounting positions



## Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14	15,4	16,3	17,2	18,1	22,5	23,4	24,3

Indoor +22 °C, 20 % RH


## Hot water duct air heater \*

	Winter		
	80/60	70/50	60/40
Water temperature in/out, °C			
Capacity, kW	2,4	2,4	2,4
Flow rate, dm <sup>3</sup> /h	106	106	106
Pressure drop, kPa	2,4	2,4	2,4
Temperature in/out, °C	14 / 22,0		
Maximal capacity, kW	9,9	8,0	6,1
Connection, "	½		


\* Option

## Shown as right (R1)

View from inspection side

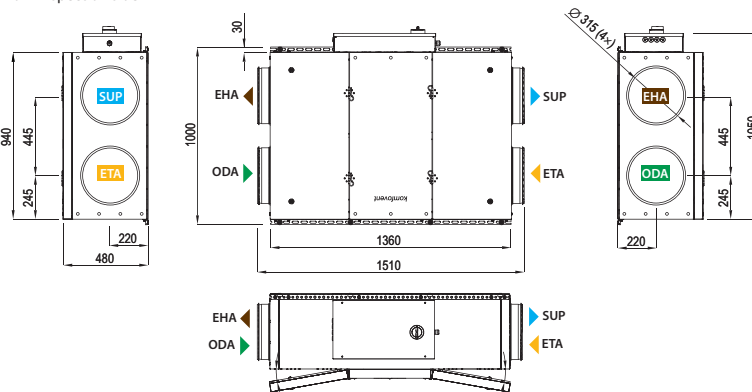

## Shown as left (L1)

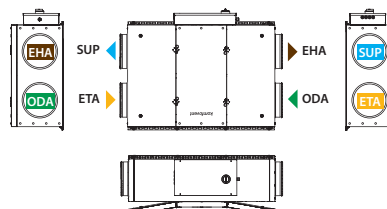

▶ ODA – outdoor intake    ▶ SUP – supply air    ▶ ETA – extract indoor    ▶ EHA – exhaust air